

Additel 715 Precision Pressure Indicator



- Up to 5 pressure measurement channels
- Pressure range from 2 psi to 15,000 psi
- Multiple accuracy options: 0.02%FS, 0.01%FS, 0.01%RD
- Built-in 1 or 2 gauge modules with barometric for absolute/gauge switching
- Connects 2 external high-precision digital modules
- Barometric module accuracy to ± 10 Pa
- 10.1" TFT color capacitive touchscreen
- Self-adaptive multichannel display

OVERVIEW

The Additel 715 is a high-performance benchtop pressure monitor designed for exceptional accuracy and long-term stability. Built with an internal precision sensor, it offers a wide selection of built-in pressure modules, providing maximum flexibility in both range and accuracy.

For enhanced capability, the ADT715 supports high-precision internal modules and up to two external digital pressure modules—enabling up to five simultaneous pressure inputs. This makes it an ideal solution for calibration labs, manufacturing environments, and any application demanding highly accurate pressure measurement.

The large, easy-to-read touchscreen display and built-in pressure applications both streamline operation and increase productivity. With support for rack mounting and an optional high-capacity Li-ion battery, the ADT715 is equally functional in the lab or in the field. Whether you're looking for a simple, large-screen, high-accuracy barometer, a highly accurate five-channel pressure monitoring device, or something in between, the ADT715 has you covered.

General Specifications

Specification	Description
Display	10.1 inch TFT color capacitive touch screen
Display Rate	10 readings per second
Resolution	5, 6, 7 digits (user selectable)
Size	11 × 9 × 6.26 in (281 × 230 × 159 mm)
Weight	10.48 lbs (4.8 Kgs) with 3 built-in modules and without external module and battery
Power Supply	28V DC adaptor, optional rechargeable Li-ion battery, typically 8 hours of operation
Units	psi, psf, atm, inH2O (4 °C), inH2O (20 °C), inH2O (60 °F), mbar, bar, Dy/cm2, pascal, hPa, kPa, MPa, inHg (0 °C), inHg (60 °F), mTorr, Torr, mmHg (0 °C), cmHg (0 °C), mHg (0 °C), mmH2O (4 °C), cmH2O (4 °C), mH2O (4 °C), mmH2O (20 °C), cmH2O (20 °C), mH2O (20 °C), ftH2O (4 °C), ftH2O (20 °C), ftH2O (60 °F), tsi, tsf, g/cm ² , kg/cm ² , kg/m ² 5 customizable units 2 height units: Meters and feet
Environment	Working temperature: 0 ~ 40 °C Ensuring accuracy temperature: 15 ~ 35 °C Operating humidity: 0 % ~ 90% RH (non-condensing) Storage temperature: -20 ~ 70 °C Altitude: < 2000 m
Compliance	CE
Warm-Up Time	20 minutes (for optimal performance)
Communication	Wi-Fi (optional), USB*2, Ethernet*2, HDMI*1
Installation Methods	Supports desktop and rack installation (screw posts are reserved at the bottom of the device, which can be installed into the cabinet)
Built-In Pressure Modules (CH1 & CH2 & CH3) (See built-in pressure modules selection table)	Pressure port: 1/8 BSF M Pressure ≤ 10K PSI: pre-installed with 1/8 BSP M to 1/4 BSP F adapter, optional high-pressure hose connection with various general adapters. Pressure > 10K PSI: pre-installed with 1/8 BSP M to 1/4HP M adapter, optional ultra-high-pressure hose connection with various special adapters. CH1 optional barometric pressure module; CH2 and CH3 can be equipped with 1 or 2 built-in pressure modules selected by the user
External Module (CH4 & CH5) (See ADT161 Selection Table)	5-pin Lemo connector for connection with external pressure modules
Accuracy	Barometric module: ±10 Pa (For BPH), ±22 Pa (For BP); Gauge module: 0.01%FS, 0.02%FS, 0.01% rdg or 0.005% FS whichever is greater
Annual Stability	0.005%FS
Pressure Medium	≤ 15 psi: Dry, clean and non-corrosive gas compatible with 316SS > 15 psi: Non-corrosive gas or liquid compatible with 316SS
Warranty	1 Year

Built-In Pressure Modules Selection Table

Barometric Pressure					
P/N	Pressure Range		Media	Accuracy	Burst Pressure
	Low	High			
BP	60 kPa	110 kPa	G	22Pa	3x
BPH	60 kPa	110 kPa	G	10 Pa	3x

Range	Model	Compound Gauge pressure		Media	Accuracy(%FS)	Burst Pressure
		1st range	2nd range			
CP15K		(-15~15000) psi (-1~1000) bar	(-15~6000) psi (-1~400) bar	G,L	0.01 (0.02)	3x
CP10K		(-15~10000) psi (-1~700) bar	(-15~5000) psi (-1~350) bar	G,L	0.01 (0.02)	3x
CP6K		(-15~6000) psi (-1~400) bar	(-15~3000) psi (-1~200) bar	G,L	0.01 (0.02)	3x
CP5K		(-15~5000) psi (-1~350) bar	(-15~3000) psi (-1~200) bar	G,L	0.01 (0.02)	3x
CP3.6K		(-15~3600) psi (-1~250) bar	(-15~1500) psi (-1~100) bar	G,L	0.01 (0.02)	3x
CP3K		(-15~3000) psi (-1~200) bar	(-15~1500) psi (-1~100) bar	G,L	0.01 (0.02)	3x
CP1.5K		(-15~1500) psi (-1~100) bar	(-15~1000) psi (-1~70) bar	G,L	0.01 (0.02)	3x
CP1K		(-15~1000) psi (-1~70) bar	(-15~500) psi (-1~35) bar	G,L	0.01 (0.02)	3x
CP600		(-15~600) psi (-1~40) bar	(-15~300) psi (-1~20) bar	G,L	0.01 (0.02)	3x
CP500		(-15~500) psi (-1~35) bar	(-15~300) psi (-1~20) bar	G,L	0.01 (0.02)	3x
CP300		(-15~300) psi (-1~20) bar	(-15~150) psi (-1~10) bar	G,L	0.01 (0.02)	3x
CP150		(-15~150) psi (-1~10) bar	(-15~60) psi (-1~4) bar	G,L	0.01 (0.02)	3x
CP100		(-15~100) psi (-1~7) bar	(-15~50) psi (-1~3.5) bar	G,L	0.01 (0.02)	3x
CP50		(-15~50) psi (-1~3.5) bar	(-15~30) psi (-1~2) bar	G,L	0.01 (0.02)	3x
CP35		(-15~35) psi (-1~2.5) bar	(-15~15) psi (-1~1) bar	G,L	0.01 (0.02)	3x
CP30		(-15~30) psi (-1~2) bar	(-15~15) psi (-1~1) bar	G,L	0.01 (0.02)	3x
CP15		(-15~15) psi (-1~1) bar	(-10~10) psi (-0.7~0.7) bar	G	0.01 (0.02)	3x
CP10		(-10~10) psi (-0.7~0.7) bar	(-5~5) psi (-0.35~0.35) bar	G	0.01 (0.02)	3x
CP5		(-5~5) psi (-0.35~0.35) bar	(-2~2) psi (-0.16~0.16) bar	G	0.01 (0.02)	3x

High-precision Gauge Pressure Module Specifications						
Model	Gauge pressure range	Absolute Pressure Range ^[1]	Media	Precision ^{[2][4]}	Accuracy ^{[2][5]}	Burst Pressure
CP15KM	(-15~15000) psi (-1~1000) bar	(0~15015) psi (0~1001) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	1.3x
CP10KM	(-15~10000) psi (-1~700) bar	(0~10015) psi (0~701) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP6KM	(-15~6000) psi (-1~400) bar	(0~6015) psi (0~401) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP5KM	(-15~5000) psi (-1~350) bar	(0~5015) psi (0~351) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP3.6KM	(-15~3600) psi (-1~250) bar	(0~3615) psi (0~251) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP3KM	(-15~3000) psi (-1~200) bar	(0~3015) psi (0~201) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP1.5KM	(-15~1500) psi (-1~100) bar	(0~1515) psi (0~101) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	1.3x
CP1KM	(-15~1000) psi (-1~70) bar	(0~1015) psi (0~71) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP500M	(-15~500) psi (-1~35) bar	(0~515) psi (0~36) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP300M	(-15~300) psi (-1~20) bar	(0~315) psi (0~21) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP150M	(-15~150) psi (-1~10) bar	(0~165) psi (0~11) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	1.3x
CP100M	(-15~100) psi (-1~7) bar	(0~115) psi (0~8) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP50M	(-15~50) psi (-1~3.5) bar	(0~65) psi (0~4.5) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP35M	(-15~35) psi (-1~2.5) bar	(0~50) psi (0~3.5) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x
CP30M	(-15~30) psi (-1~2) bar	(0~45) psi (0~3) bar	G,L	0.008% rdg or 0.004% FS whichever is greater	0.01% rdg or 0.005% FS whichever is greater	2x

[1] Absolute pressure is achieved through the synthesis of the basic gauge pressure module and the optional atmospheric pressure module.
 [2] The accuracy of the negative pressure part is equal to the accuracy of the positive pressure part, such as the maximum error of -15 psi is equal to the maximum allowable error of 15 psi.
 [3] FS refers to the positive range, and the accuracy of the negative pressure part is equal to that of the positive pressure part.
 [4] Precision: the error components include linearity, hysteresis, repeatability, resolution, and temperature compensation.
 [5] Accuracy: the error components include linearity, hysteresis, repeatability, resolution, reference standard measurement uncertainty, annual drift, temperature compensation, K=2.




ADT715 Model Configuration Table				
Model	CH1 (Internal)	CH2 (Internal)	CH3 (Internal)	CH4 (External) & CH5 (External)
ADT715-BP/BPH 1 X Internal BP/BPH Module 2 X External ADT161 Module Ports	■ Barometric Module	○	○	Included
ADT715-X-CPX-BP/BPH 2 X Internal Pressure Modules 2 X External ADT161 Module Ports	■ Barometric Module	■ Pressure Module	○	Included
ADT715-X-CPX 1 X Internal Pressure Module 2 X External ADT161 Module Ports	○	■ Pressure Module	○	Included
ADT715-X-CPX-CPX 2 X Internal Pressure Modules 2 X External ADT161 Module Ports	○	■ Pressure Module	■ Pressure Module	Included
ADT715-X-CPX-CPX-BP/BPH 3 X Internal Modules 2 X External ADT161 Module Ports	■ Barometric Module	■ Pressure Module	■ Pressure Module	Included

Note: Switching between gauge and absolute pressure is supported via the built-in or external barometric module.


■-Required ○-Not Available

Ordering Information

Model Number

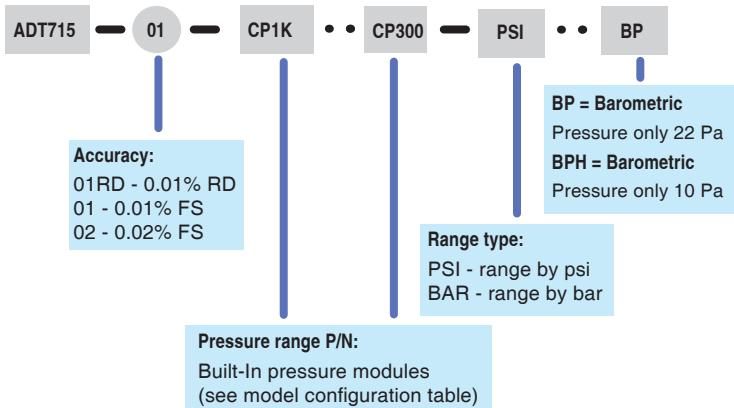

Model Numbers for BP only units



Accessories

Standard Accessories			
Description	QTY	Picture	
28V external power cord	1 pc		
Battery Cover	1 pc		
O ring (5*1.5)	5 pcs		
Adapter, 1/4 NPT M to 1/4 BSP F	1 pc		
Pressure module connection cable 9060	1 pc		
Silicon tube 1.5m (BP/BPH models only)	1 pc		
Adapter, 1/4 BSP F to barb connection (BP/BPH models only)	1 pc		
ISO 17025 accredited calibration certificate	1 pc		

Optional Accessories

Model	Description	Picture
9725	Rechargeable Li-ion battery	
9050	Serial converter with extended cable	
9055-2	USB to WIFI module	
9060	Pressure module connection cable	
ADT100-X-X (For black flexible hose)	ADT100-BSPM4-M20M	
	ADT100-BSPM4-BSPM2	
	ADT100-BSPM4-BSPM4	
	ADT100-BSPM4-NPTM2	
ADT100-NPTM4-BSPM4		
ADT100-X-X (For redflexible hose)	ADT100-HPM-HPM	
Black Flexible Hose	Black, 1.5m, maximum pressure: 720 bar, for pressure ≤ 700 bar	
Adapter	Adapter, 1/4 BSP F to 6mm barb fitting	
Red Flexible Hose	Red, 1.5m, maximum pressure: 280MPa for Pressure > 700 bar	
Silicone tube	Silicone tube (1.5m)	