


SV7610



SV vortex flowmeters with display for water based media

SVN34XXXIRKKG/US-100

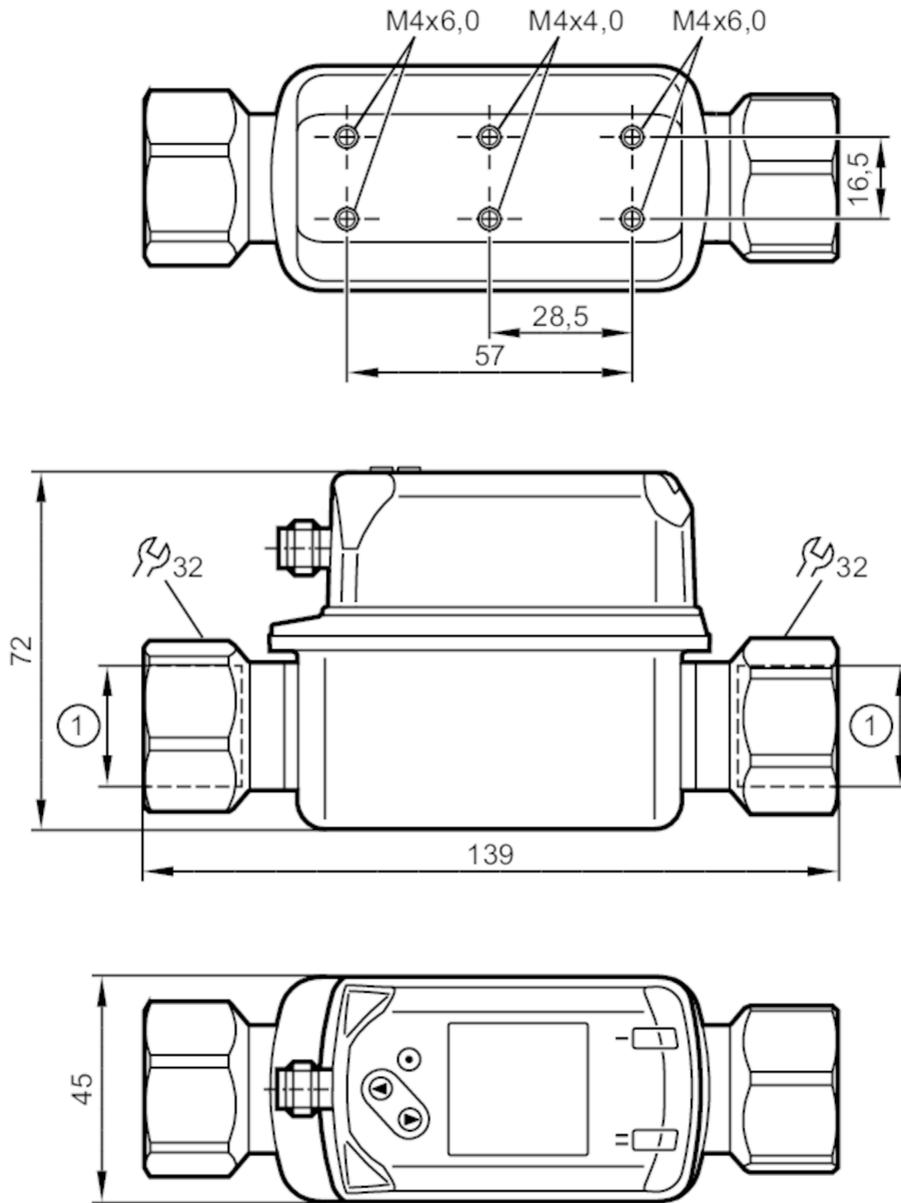

1 3/4" NPT
DN 20



Product characteristics

Number of inputs and outputs	Number of digital outputs: 2	
Measuring range	80...1585 gph	1.3...26.4 gpm
Process connection	threaded connection 3/4" NPT Internal thread DN20	

Application

System	gold-plated contacts
Application	for industrial applications
Media	water; glycol solutions; Coolants
Medium temperature [°F]	14...194

SV7610



SV vortex flowmeters with display for water based media

SVN34XXXIRKG/US-100

Pressure rating	12 bar	174 psi	1.2 MPa
Note on pressure rating	up to 40 °C		
MAWP (for applications according to CRN) [bar]	4.3		
Electrical data			
Operating voltage [V]	18...30 DC		
Current consumption [mA]	< 30		
Min. insulation resistance [MΩ]	100; (500 V DC)		
Protection class	III		
Reverse polarity protection	yes		
Power-on delay time [s]	< 3		
Measuring principle	Vortex		
Inputs / outputs			
Number of inputs and outputs	Number of digital outputs: 2		
Outputs			
Total number of outputs	2		
Output signal	switching signal; frequency signal; IO-Link; (configurable)		
Electrical design	PNP/NPN		
Number of digital outputs	2		
Output function	normally open / closed; (configurable)		
Max. voltage drop switching output DC [V]	2.5		
Permanent current rating of switching output DC [mA]	100		
Short-circuit protection	yes		
Overload protection	yes		
Measuring/setting range			
Measuring range	80...1585 gph	1.3...26.4 gpm	
Display range	0...1900 gph	0...31.7 gpm	
Resolution	5 gph	0.1 gpm	
Set point SP	95...1585 gph	1.6...26.4 gpm	
Reset point rP	80...1570 gph	1.3...26.2 gpm	
Frequency end point, FEP	315...1585 gph	5.3...26.4 gpm	
In steps of	5 gph	0.1 gpm	
Frequency at the end point FRP [Hz]	100...1000		
Measuring dynamics	1:20		
Temperature monitoring			
Measuring range [°F]	14...194		
Display range [°F]	-22...230		
Resolution [°F]	1		
Set point SP [°F]	16...194		
Reset point rP [°F]	14...192		
In steps of [°F]	1		
Frequency start point, FSP [°F]	14...158		
Frequency end point, FEP [°F]	50...194		

SV7610



SV vortex flowmeters with display for water based media

SVN34XXXIRKG/US-100

Frequency at the end point FRP	[Hz]	100...1000
Accuracy / deviations		
Flow monitoring		
Accuracy (in the measuring range)		± 2 % MEW; (water)
Repeatability		± 0,5 % MEW
Temperature monitoring		
Accuracy	[K]	± 1
Reaction times		
Flow monitoring		
Response time	[s]	1; (dAP = 0)
Damping process value dAP	[s]	0...5
Temperature monitoring		
Dynamic response T05 / T09	[s]	T09 = 6
Software / programming		
Parameter setting options		hysteresis / window; normally open / closed; switching logic; Frequency output; switch-on/switch-off delay; Damping; Display unit
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles	Smart Sensor - SSP 0	Generic Profiled Sensor
	Function	Device identification
	Function	Process data variable
	Function	Device diagnosis
SIO mode		yes
Required master port class		A
Process data analog		2
Process data binary		2
Min. process cycle time	[ms]	3
Supported DeviceIDs	Type of operation	DeviceID
	default	494
Operating conditions		
Ambient temperature	[°F]	32...140
Note on ambient temperature		medium temperature < 176 °F medium temperature < 194 °F: 32...122 °F
Storage temperature	[°F]	-4...176
Protection		IP 65; IP 67
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	5 g (11 ms)

SV7610



SV vortex flowmeters with display for water based media

SVN34XXXIRKG/US-100

Vibration resistance	DIN EN 60068-2-6	with water / 10...50 Hz 1 mm
		with water / 50...2000 Hz 2 g
MTTF [years]		342
UL approval	UL approval number	I001
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	

Mechanical data

Weight [g]	505.5	
Housing	rectangular	
Dimensions [mm]	139 x 45 x 72	
Material	stainless steel (1.4404 / 316L); PC; PBT+PC-GF30; PPS; TPE-U	
Materials (wetted parts)	stainless steel (1.4404 / 316L); ETFE; PA 6T; PPS; FKM	
Tightening torque [Nm]	30	
Process connection	threaded connection 3/4" NPT Internal thread DN20	

Displays / operating elements

Display	Color display 1,44", 128 x 128 pixels	
	2 x LED, yellow	

Remarks

Remarks	MW = Measured value	
	MEW = Final value of the measuring range	
Pack quantity	1 pcs.	

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated




SV7610



SV vortex flowmeters with display for water based media

SVN34XXXIRKG/US-100


Connection

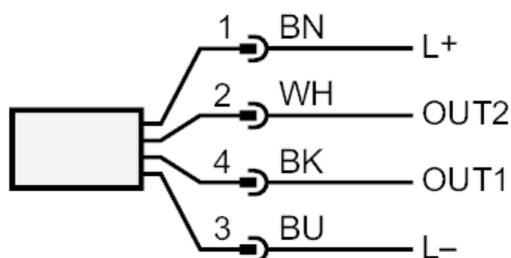

- OUT1: Flow monitoring
- Switching output
- Frequency output
- IO-Link
- OUT2: flow monitoring and temperature monitoring
- Switching output
- Frequency output
Colors to DIN EN 60947-5-2
Core colors :
- BK = black
BN = brown
BU = blue
WH = white

Diagrams and graphs

Pressure loss

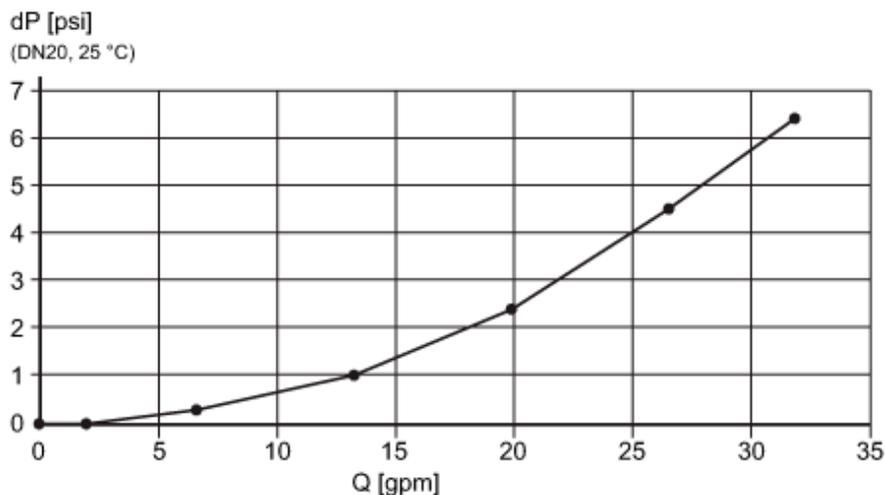

dP Pressure loss
Q volumetric flow quantity

SV7610



SV vortex flowmeters with display for water based media

SVN34XXXIRKG/US-100

pressure rating (bar)

