

**Precise non-contact  
temperature measurement  
from  $-50\text{ }^{\circ}\text{C}$  to  $1050\text{ }^{\circ}\text{C}$   
( $-58\text{ }^{\circ}\text{F}$  to  $1922\text{ }^{\circ}\text{F}$ ) in rough  
environmental conditions**



**Features:**

- The new infrared thermometer for hot environmental temperatures up to  $250\text{ }^{\circ}\text{C}$  ( $482\text{ }^{\circ}\text{F}$ ) without any need of cooling
- A variety of applications in dryers, ovens, heat treatment lines in the metal and glass industry, paper, plastic and textile manufacturing and semiconductor processing in the temperature range of  $-50\text{ }^{\circ}\text{C}$  to  $1050\text{ }^{\circ}\text{C}$  ( $-58\text{ }^{\circ}\text{F}$  to  $1922\text{ }^{\circ}\text{F}$ ) and a response time up from 40 ms
- Selectable analog outputs: 0/4 – 20 mA, 0 – 5 V, 0 – 10 V, thermocouple type K
- Optional EtherNet/IP, Profinet, Ethernet TCP/IP / Modbus TCP, Modbus RTU, RS485, RS232 interface or relay outputs (2 x optically isolated)
- Easy and flexible exchange of sensing heads

**General specifications**

Environmental rating	IP 65 (NEMA-4)
Ambient temperature	$-20\text{ }^{\circ}\text{C}$ ... $250\text{ }^{\circ}\text{C}$ [ $-4\text{ }^{\circ}\text{F}$ ... $482\text{ }^{\circ}\text{F}$ ] (sensing head) $0\text{ }^{\circ}\text{C}$ ... $85\text{ }^{\circ}\text{C}$ [ $32\text{ }^{\circ}\text{F}$ ... $185\text{ }^{\circ}\text{F}$ ] (electronics)
Storage temperature	$-40\text{ }^{\circ}\text{C}$ ... $250\text{ }^{\circ}\text{C}$ [ $-40\text{ }^{\circ}\text{F}$ ... $482\text{ }^{\circ}\text{F}$ ] (sensing head) $-40\text{ }^{\circ}\text{C}$ ... $85\text{ }^{\circ}\text{C}$ [ $-40\text{ }^{\circ}\text{F}$ ... $185\text{ }^{\circ}\text{F}$ ] (electronics)
Relative humidity	10–95%, non condensing
Vibration (sensor)	IEC 60068-2-6 (sinus shaped) IEC 60068-2-64 (broadband noise)
Shock (sensor)	IEC 60068-2-27 (25G and 50G)
Weight	200 g (1.4 oz) (sensing head incl. massive housing) / 420 g (14.8 oz) (electronics)

**Electrical Specifications**

Outputs / analog	0 / 4 – 20 mA, 0 – 5 / 10 V, thermocouple K, alarm
Output / alarm	24 V / 50 mA (open collector)
Optional	Relay: 2 x 60 V DC / 42 V AC <sub>RMS</sub> ; 0.4 A; optically isolated
Digital Interfaces	built-in USB-interface, Optional: EtherNet/IP, Profinet, Ethernet TCP/IP / Modbus TCP, Modbus RTU, RS485, RS232 or relay outputs (2 x optically isolated)
Output impedances	mA max. 500 $\Omega$ (with 8–36 V DC) mV min. 100 k $\Omega$ load impedance thermocouple 20 $\Omega$
I/O Pins (3x)	flexible programming as in- or output: external emissivity adjustment, ambient temperature compensation, uncommitted value, trigger (reset of holdfunctions), alarm output (open collector 24 V / 50 mA)
Cable length	3 m (standard), 8 m, 15 m (9.8 ft [standard], 26.2 ft, 49.2 ft)
Power supply	8 - 30 V DC / 1.2W

**Measurement specifications**

Temperature range (scalable via programming keys or software / App)	$-50\text{ }^{\circ}\text{C}$ ... $1050\text{ }^{\circ}\text{C}$ [ $-58\text{ }^{\circ}\text{F}$ ... $1922\text{ }^{\circ}\text{F}$ ]
Spectral range	8–14 $\mu\text{m}$
Optical resolution (90% energy)	2:1 10:1
Smallest spot size	3.0 mm @30 mm (LThot 10:1 CF1 lens)
Measurement uncertainty <sup>2), 3), 4), 5), 7)</sup>	$\pm 1.5\text{ }^{\circ}\text{C}$ or $\pm 1\%$ [ $\pm 2.7\text{ }^{\circ}\text{F}$ or $\pm 1\%$ ]
Repeatability <sup>2), 3), 4), 5), 7)</sup>	$\pm 0.13\text{ }^{\circ}\text{C}$ or $\pm 0.1\%$ [ $\pm 0.23\text{ }^{\circ}\text{F}$ or $\pm 0.1\%$ ] (LThot 2:1) $\pm 0.16\text{ }^{\circ}\text{C}$ or $\pm 0.1\%$ [ $\pm 0.29\text{ }^{\circ}\text{F}$ or $\pm 0.1\%$ ] (LThot 10:1)
Temperature resolution (display)	0.1 K
NETD (typically) <sup>4), 5), 6), 7)</sup>	37 mK (LThot 2:1) 45 mK (LThot 10:1)
Response time (90% energy)	45 ms (LThot 2:1) 40 ms (LThot 10:1)
Emissivity / Gain (adjustable via programming keys or software / App)	0.100–1.100
Transmissivity / Gain (adjustable via programming keys or software / App)	0.100–1.100
Signal processing (parameter adjustable via programming keys or software / App)	Peak hold, valley hold, average; extended hold functions with threshold and hysteresis
Software / App	Optris CompactPlus Connect / IRmobile App

<sup>1)</sup> The LCD displays capacity may be limited at ambient temperatures below  $0\text{ }^{\circ}\text{C}$

<sup>2)</sup> Whichever is greater

<sup>3)</sup>  $T_{\text{obj}} > 32\text{ }^{\circ}\text{F}$

<sup>4)</sup>  $\epsilon = 1$

<sup>5)</sup> Response time = 200ms


<sup>6)</sup>  $T_{\text{obj}} = 77\text{ }^{\circ}\text{F}$

<sup>7)</sup> at ambient temperature  $23 \pm 5\text{ }^{\circ}\text{C}$  ( $73.4 \pm 9\text{ }^{\circ}\text{F}$ )


# optris CTi LHot

## Optical specifications


Optics: SF D:S: 10:1

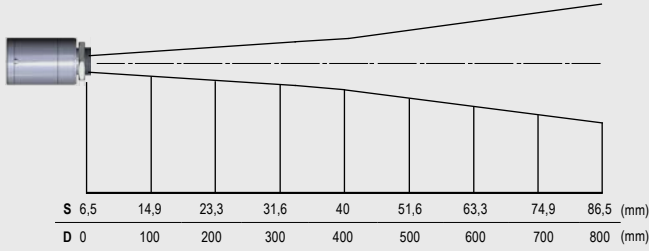

Optics: SF D:S: 2:1

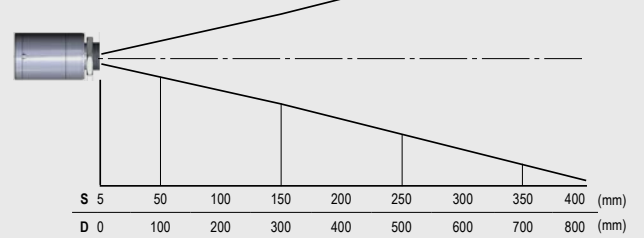


Optics: CF1 | D:S: 10:1  
3,0mm@ 30mm | D:S (far field) = 3:1

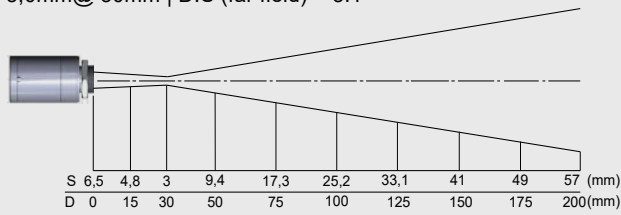

More optical data: <https://optris.com/us/optris-calculator/>

## Dimensions in mm (in)

Electronics

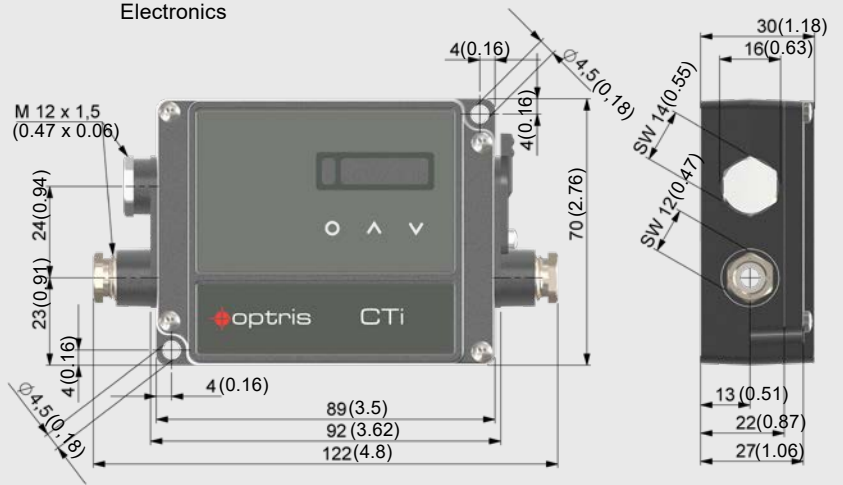

Sensing head (standard)

